


## **Product Information Bulletin**

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

## **Yield Sign MUTCD R1-2**



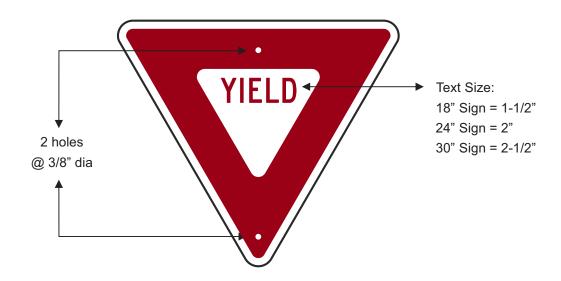

**EG**Engineering Grade



**HIP**High Intensity Prismatic



**DG**Diamond Grade

YIELD SIGN SIZE AND MATERIAL OPTIONS				
Material Options	18 x 18" 457 x 457 mm	24 x 24" 610 x 610 mm	<b>30 x 30"</b> 762 x 762 mm	
Engineering Grade Type I Reflective Vinyl	Х	X	X	
.080" Engineering Grade Type I Reflective Aluminum	Х	Х	X	
.080" High Intensity Prismatic Type IV Reflective Aluminum		X	X	
.080" Diamond Grade Type IX Reflective Aluminum				


DATE: / /	JOB:
CONTRACTOR:	





## **Product Information Bulletin**


64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809


# **Yield Sign Actual Dimensions**

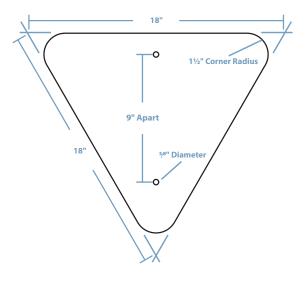


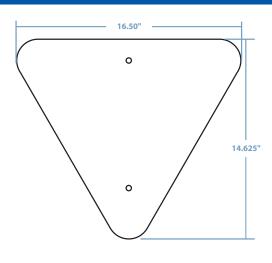

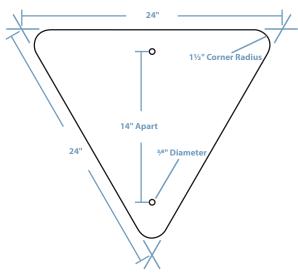

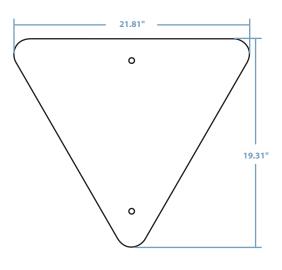

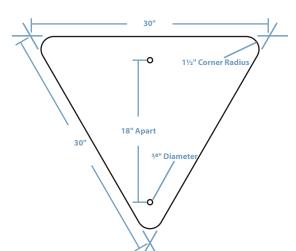

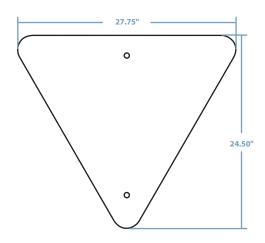



#### **Product Information Bulletin**

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

## **Yield Sign MUTCD R1-2**

MATERIAL	MATERIAL	CHEMICAL	OUTDOOR	TEMP	CORNER	MOUNT
THICKNESS	NAME	RESISTANCE	DURABILITY	RANGE	RADIUS	HOLES
.080"	Engineering Grade Reflective on Rust Free Aluminum	Fading & Mild Chemicals	Up to 7 Years (Except Orange Up to 3 years)	-10°F - 130°F	1-1/2"	2 @ 13/8"

- · Engineering Grade (EG) retro-reflective sheeting is a beaded plastic material that renders high retro-reflectivity at night.
- Engineering Grade (EG) Reflective Sheeting meets ASTM D4956 Type I retro-reflective sheeting standards.
- Graphics are printed using any of the following printing methods: translucent inks (screen printing), applied vinyl graphics and/or thermal transfer (digital printing); translucent ink or film is not applicable to the color black
- Overlaminated Options (Additional Charge): 3M Anti Graffiti Over Laminate
- · Mounting: Post mounting.

.080"	High Intensity Prismatic Reflective on Rust Free Aluminum	Fading & Mild Chemicals	7 to 10 Years (Except Orange Up to 3 years)	-10°F - 130°F	1-1/2"	2 @ 13/8"
-------	---	----------------------------	---	---------------	--------	-----------

- Any sign laminated with this retro-reflective High Intensity Prismatic (Type IV) Reflective material is 3 to 4 times brighter than any Engineering Grade (EG) sign and can last up to 10 years outdoors.
- High Intensity Prismatic is the replacement material required by many State DOTs when posting new traffic signs. Our High Intensity Prismatic materials provide long-term reflectivity and durability.
- · High Intensity Prismatic (HIP) Reflective Sheeting meets ASTM D4956 Type IV retro-reflective sheeting standards.
- Graphics are printed using any of the following printing methods: translucent inks (screen printing), applied vinyl graphics and/or thermal transfer (digital printing); translucent ink or film is not applicable to the color black
- Overlaminated Options (Additional Charge): 3M Anti Graffiti Over Laminate
- Mounting: Post mounting.

.080"	nite Diamond Grade Reflective on ust Free Aluminum	Fading & Mild Chemicals	10+ Years	-10°F - 130°F	1-1/2"	2 @ 13/8"
-------	--	----------------------------	-----------	---------------	--------	-----------

- Diamond Grade Type IX Reflective Sheeting is a super-high efficiency, retro-reflective sheeting designed for signs that need to be highly visible during daytime, nighttime, twilight, and inclement weather.
- Excellent visibility at wide entrance and observation angles.
- This sheeting is designed to have the highest retro reflective characteristics at medium and short road distance.
- Diamond Grade fluorescent reflective sheeting provides higher visibility than ordinary (non-fluorescent) colored sheetings.
- Diamond Grade is 10 times brighter than Engineering Grade or High Intensity Prismatic retro-reflective Sheeting.
- Warranty: Diamond Grade Reflective Sheeting will remain effective for its intended use and meet minimum required values for coefficient of retro-reflectivity for up to 10 years.

DATE: / /	JOB:
CONTRACTOR:	