

## Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

# LOCATOR BULLET WITH TOP HAT MARKER

The Locator Bullet Marker with Top Hat offers a versatile, dual-purpose solution built for durability and efficiency in the field. Constructed from high-impact, weather-resistant HDPE, it combines a sturdy Bullet Marker post with an integrated Cathodic Protection (CP) Test Station, making it perfect for both line marking and cathodic testing. Its bolt-secured top hat allows quick, secure access for maintenance, ensuring dependable performance across pipelines, fiber routes, electric utilities, and municipal systems. By merging a highly visible marker with a functional CP Test Station in one rugged, UV-protected unit, this marker enhances field efficiency, simplifies testing, and provides a long-lasting, cost-effective solution. It offers field efficiency, ensures consistent installation, and offers a reliable, cost-effective solution.



**YELLOW BULLET HEAD ON WHITE POST**

## 360° VISIBILITY

- STANDARD LENGTHS ARE 6' AND 8'.
- CUSTOM LENGTHS ARE ALSO AVAILABLE.

**BULLET SLEEVE AND CAP COLORS**  
 CONFORMS TO APWA UNIFORM COLOR STANDARDS  
 CUSTOM COLORS AVAILABLE




### ANCHOR OPTION:

- THE **BRIMAR BARB ANCHOR** IS 4" LONG AND IS MANUFACTURED FROM 0.062 RIGID PVC. IT IS SECURELY FASTENED TO THE HDPE POST USING A SCREW.



**CLIP ANCHOR**

### TECHNICAL SPECIFICATIONS:

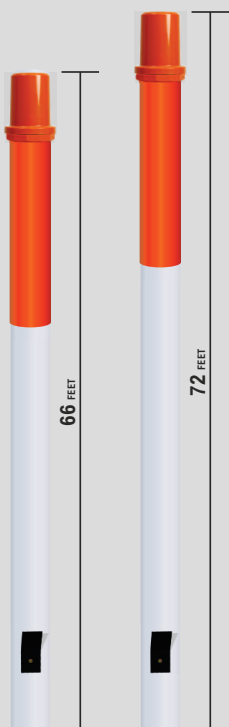

MATERIAL	HIGH DENSITY POLYETHYLENE (HDPE)
WALL THICKNESS	.125 - .318
DENSITY	.952 TO .953
LINEAR EXPANSION	12
ELONGATION AT BREAK (%)	150
STRAIN AT YIELD (%)	15
WATER ABSORPTION (%)	0.02
OXYGEN INDEX (%)	17
FLAMMABILITY UL94	HB
VOLUME RESISTIVITY (log ohm.cm)	17
DIELECTRIC STRENGTH (MV/m)	22
DISSIPATION FACTOR 1 kHz	2.3
HDT @ 0.45 Mpa (c)	75
HDT @ 1.80 Mpa (C)	46
SERVICE TEMPERATURE	-70 - 320 FAHRENHEIT - ASTM D746
TENSILE STRENGTH (TS)	MINIMUM (TS) OF 2700 POUNDS PER SQUARE INCH AS MEASURED BY ASTM D638. (SEPARATION RATE = 2 IN/MIN)

# INSTRUCTIONS FOR LOCATOR BULLET WITH TOP HAT MARKER INSTALLATION

(ALWAYS CALL 811 BEFORE DIGGING)

## REQUIRED TOOLS

Shovel or Post Hole Digger



## 1. DIG HOLE 18" DEEP / 6" WIDE



## 2. PLACE MARKER INTO GROUND



## 3. BACKFILL DIRT AND TAMP

