


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

3-Way Sign A5000 .060" Polystyrene

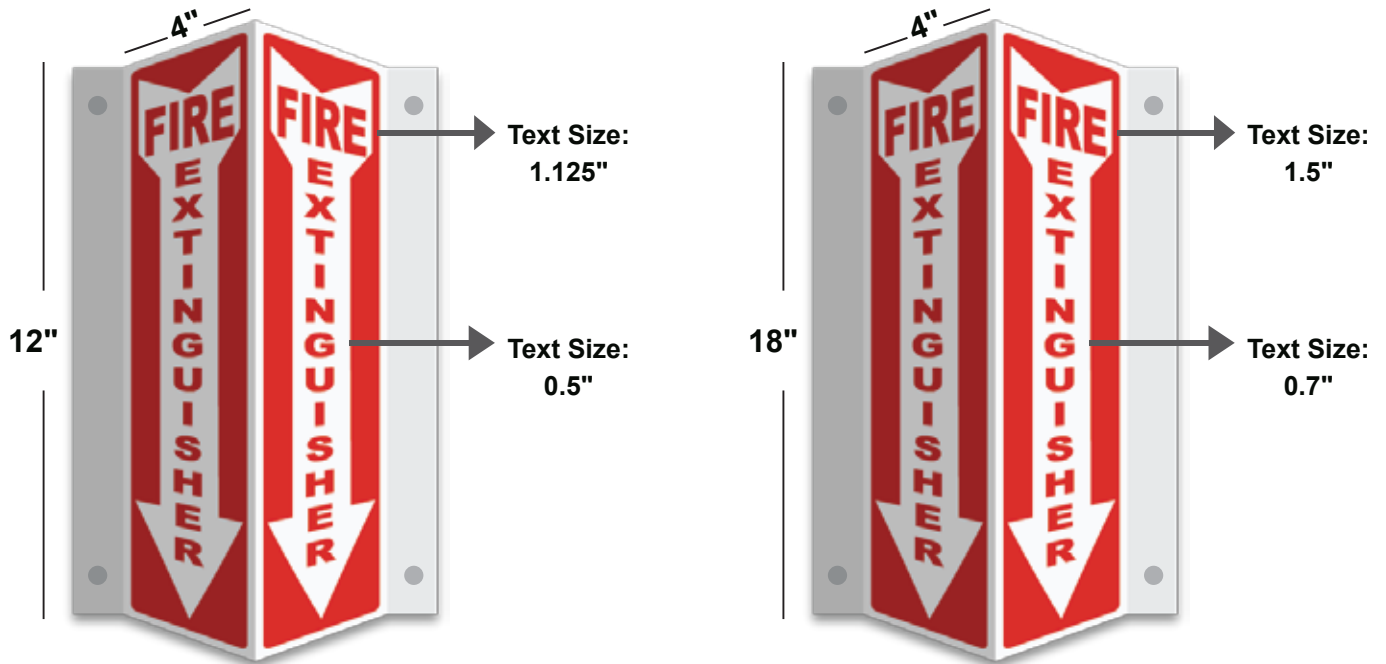

3-Way signs can be mounted on any flat surface.

Signs contain 2 panels printed with the same information.
Each panel measures 4 x 12" or 4 x 18" with 1" flanges

3-way signs offer 180° visibility

Material:

Polystyrene Plastic: Polystyrene is a low weight, high impact resistant plastic that is rust-free, chip and crack resistant, and is ideal for many applications.

Outdoor Durability:

Up to 2 years

Mounting Options:

Four 7/32" Holes (#10 or 3/16" screws recommended)

DATE: / /


JOB: _____

CONTRACTOR: _____

Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

3-Way Sign A5000 .046" Glow in the Dark

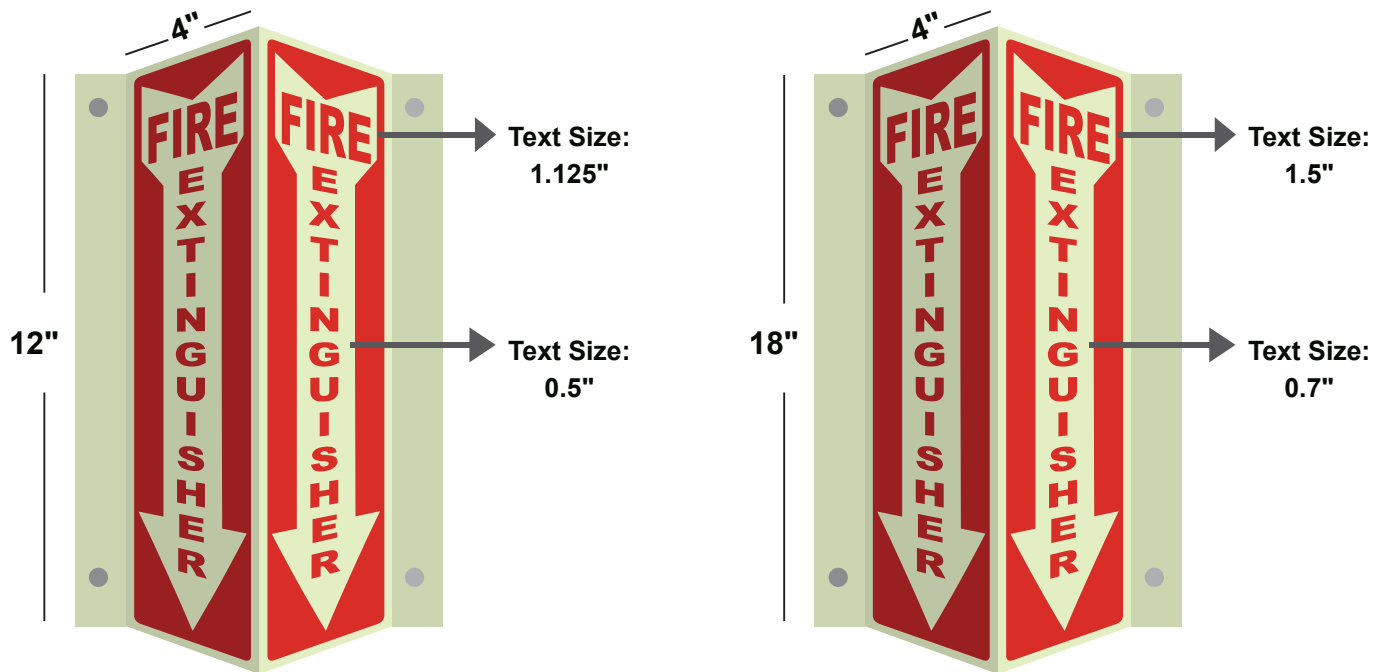

3-Way signs can be mounted on any flat surface. 3-way signs offer 180° visibility
 Signs contain 2 panels printed with the same information.
 Each panel measures 4 x 12" or 4 x 18" with 1" flanges

Material:

.046 Glow in the dark plastic signs are typically used in no light and low light applications, as well as emergency situations of power loss.

- This material meets or exceeds DIN 67510-I, ASTM 2072, ISO 15370, IMO Res. A.752 (18), JIS Z9100, NYC RS6-1.
- Signs will glow for 10 hours in continuous darkness.
- Material is charged by any light source in 15 to 60 minutes, depending on light intensity.
- Type of light source - cool white light sources, such as fluorescent lighting and sunshine, are excellent activators. Soft warm lighting, such as incandescent light bulbs, is at the lower activation end.
- Length of Illumination - at least 60 minutes of activation are recommended.
- Mounting: Wall or fence mounting only.

Outdoor Durability: Indoor Use only

Service temp: 0° to 122° F (-17°C to 50°C)

Mounting Options: Four 7/32" Holes (#10 or 3/16" screws recommended)

DATE: / /

JOB: _____

CONTRACTOR: _____