

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

**FEATURES:**

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- 50 feet rated, visibility, readability
- Recyclable
- LEED points qualified

**TECHNICAL INFORMATION:**

Sizes: 15-3/8" x 8-3/4" x 3/4"

Letter size: 7/8" stroke with 7" height

Background: Black, Red, Green, White

Illumination: High Visibility Green

Rated Viewing Distance: 50 feet

Directional: (2) Chevron arrows included for easy direction selection

Construction: ABS plastic with photoluminescent panel

Durability: Explosion-proof/Suitable for floor proximity installation

**TESTS PASSED:**

UL 924 Emergency Lighting and Power Equipment Listed through UL;

Meets NFPA Life Safety Code 101 and OSHA requirements;

International Building and Fire Code 2009/2012/2015/2018

Listed for LED lighting.

**LIFE EXPECTANCY:** 25+ years

**POWER REQUIREMENTS:**

No additional electrical or mechanical source required



**INSTALLATION:**

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)


**APPLICATIONS:**

Both high-level and low location

Suitable for floor proximity installation

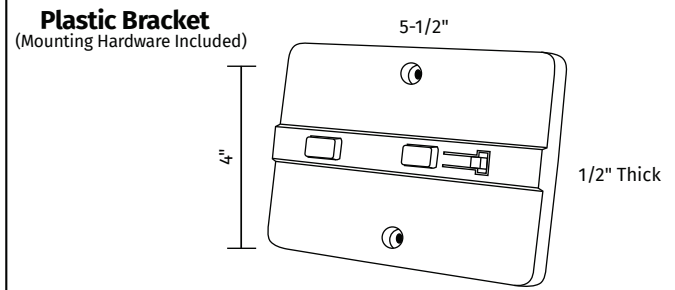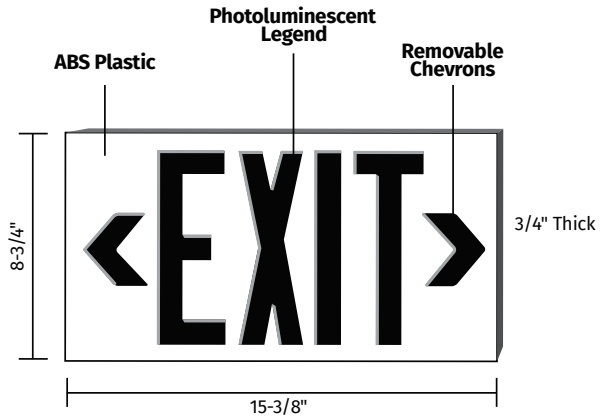

Flag Mount Option



Ceiling Mount Option

