

Job Name: _____
Type: _____
Approved By: _____
Distributor: _____

FEATURES:

- Zero energy consumption- zero cost, green design
- Zero maintenance- no bulbs, no battery replacement
- Can be charged with LED light
- Non-toxic, non-radioactive
- No disposal costs
- Designed for surface flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Easily movable if egress path changes
- Thin, low profile construction
- Consistent, uniform illumination
- 100 ft. rated, visibility, readability
- Recyclable
- LEED point contributor

TECHNICAL INFORMATION:

- Size: 15-3/8" x 8-3/4" x 3/4"
- Letter Size: 7/8" stroke with 7" letters
- Illumination: High Visibility Green
- Rated Viewing Distance: 100 feet
- Directional: (2) Field applied Chevrons
- Construction: ABS plastic with photoluminescent panel
- Durability: Explosion-proof/Suitable for Floor Proximity Installation

LISTED TO:

UL 924 Emergency Lighting and Power Equipment listed by UL
 Meets NFPA Life Safety Code 101
 OSHA Requirements
 International Building and Fire Code 2009/2012/2015/2018
 Listed for LED Lighting

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:



NO additional electrical or mechanical source required

INSTALLATION:


Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, Fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

APPLICATIONS:

Both high-level and low location
 Suitable for floor proximity installation

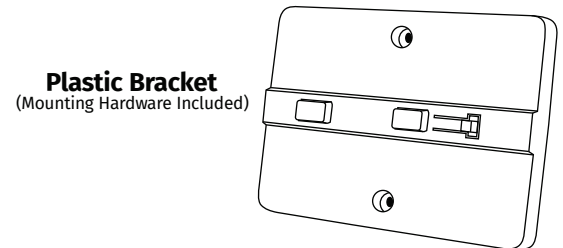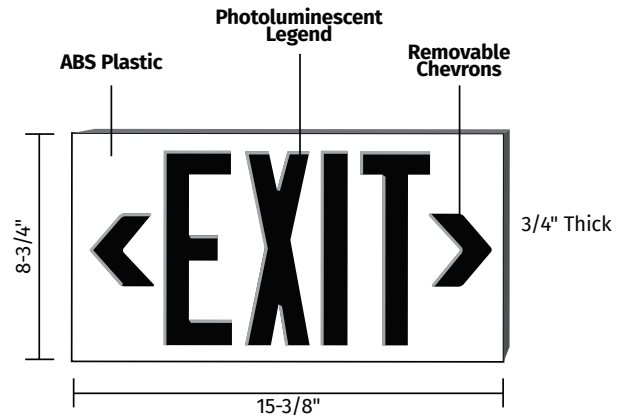

Flag Mount Option



Ceiling Mount Option

