

Job Name:	_____
Type:	_____
Approved By:	_____
Distributor:	_____

FEATURES:

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications
- Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- Visible at 100 feet
- Recyclable
- LEED point contributor
- Listed for indoor / outdoor and wet locations
- LED or fluorescent light activation

TECHNICAL INFORMATION:

Sizes: 15-7/8" x 8-5/8" x 3/8"

Letter size: 7"

Illumination: High Visibility Green

Visibility: 100 feet

Directional: 2 included (Field Applied)

Construction: ABS Plastic panel/photoluminescent lettering

Durability: Explosion-proof for areas requiring explosion-proof exit signage

LISTED TO:

UL 924 Emergency Lighting and Power Equipment listed by UL

Meets NFPA Life Safety Code 101

OSHA requirements

International Building and Fire Code 2009, 2012, 2015, 2018

Listed for LED or fluorescent light activation

LIFE EXPECTANCY: 25+ years

POWER REQUIREMENTS:

No additional electrical or mechanical source required



INSTALLATION:

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 FC of LED or fluorescent light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

APPLICATIONS:

Both high-level and low-level

Suitable for floor proximity installation

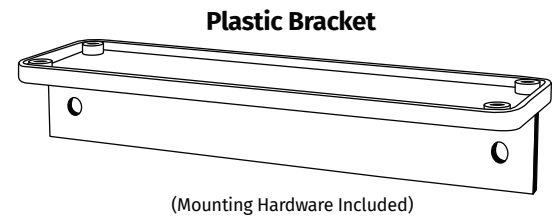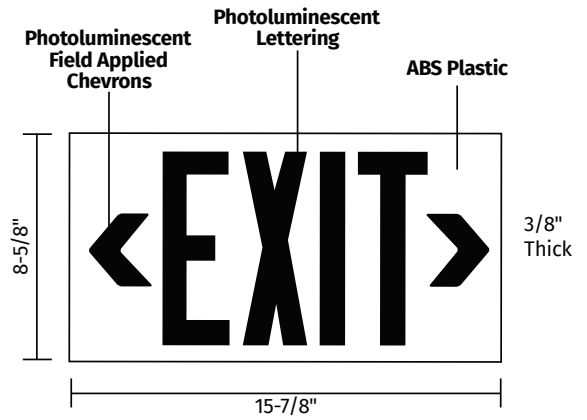

Flag Mount Option



Ceiling Mount Option