


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Sign A5037

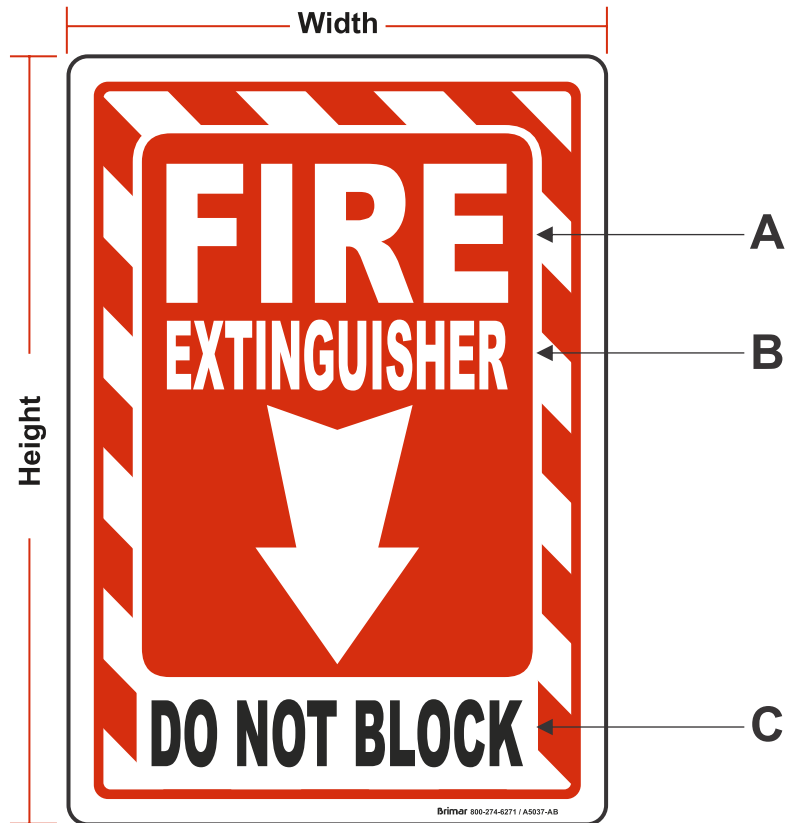

STANDARD MATERIALS		STOCK SIGN SIZES* Width x Height	
Select	Description	7 x 10" 179 x 254 mm	10 x 14" 254 x 356 mm
<input type="checkbox"/>	Label: Adhesive Backed Vinyl	X	X
<input type="checkbox"/>	Label: Glow-in-the-Dark Adhesive Backed Polyester	X	X
<input type="checkbox"/>	.055 Plastic	X	X

TEXT SIZE CHART

SIGN SIZE	SIZE OF A	SIZE OF B	SIZE OF C
7 x 10"	1.75"	1"	0.875"
10 x 14"	2.5"	1.25"	1.25"

* Other sizes available upon request

Mounting Options:

- Labels are supplied with back adhesive, no holes required.
- Plastic signs are supplied with 4 mounting holes at 0.218 dia.
- Safety Signs have been designed for the following applications: fence, wall or any flat surface mounting

Safety Sign Fonts:

- Standard fonts use: Arial Black

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____



Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Sign Colors & Materials

Standard Ink Colors*: (Close PMS Color Match)

 Black (PMS Black)

 Red (PMS 485C)

Material Information

MATERIAL THICKNESS	MATERIAL NAME	CHEMICAL RESISTANCE	OUTDOOR DURABILITY	TEMP RANGE	CORNER RADIUS	MOUNT HOLES
3.5 Mil	Adhesive Backed Vinyl	Fading & Mild Chemicals	4 to 5 years	-20°F to 200°F -29°C to 93°C	1/4" (6.3mm)	None

- Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.
- Coated with Aggressive Acrylic Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces
- **Min. Application Temp:** 50° F (10°C)
- **Surface Preparation:** Clean and Dry
- **LEED Compliance:**

This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).

4 Mil	Glow-in-the-Dark Adhesive-Backed Polyester	None	Indoor Use Only	0° to 122° F -17°C to 50°C	1/4" (6.3mm)	None
-------	--	------	-----------------	-------------------------------	-----------------	------

- Glow in the dark polyester film is typically used in no light and low light applications, as well as emergency situations of power loss.
- This material meets or exceeds DIN 67510-I, ASTM 2072, ISO 15370, IMO Res. A.752 (18), JIS Z9100, NYC RS6-1.
- Signs will glow for 10 hours in continuous darkness.
- Material is charged by any light source in 15 to 60 minutes, depending on light intensity.
- Type of light source - cool white light sources, such as fluorescent lighting and sunshine, are excellent activators. Soft warm lighting, such as incandescent light bulbs, is at the lower activation end.
- **Length of Illumination** - at least 60 minutes of activation are recommended.
- **Min. Application Temp:** 50° F (10°C)
- **Surface Preparation:** Clean and Dry

MATERIAL THICKNESS	MATERIAL NAME	CHEMICAL RESISTANCE	OUTDOOR DURABILITY	TEMP RANGE	CORNER RADIUS	MOUNT HOLES
.055" 1.4mm	Polyethylene Plastic	Fading & Mild Chemicals	3 to 5 Years	-40°F to 180°F -40°C to 82°C	1/4" 6.3mm	4 @ 7/32" 5.5mm
.125" 3.2mm					1/2" 13mm	4 @ 1/4" 6.3mm

- Polyethylene is a rust free, chip and crack resistant plastic
- Polyethylene signs are an economical alternative to aluminum signs, without significant compromise on durability.
- **Material Flexibility:** .055" thick bends easily without causing material fractures, could be molded to fit certain surfaces.
- **Mounting:** Wall or fence mounting only.

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____