


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

NFPA 170 SYMBOL SIGN A5366

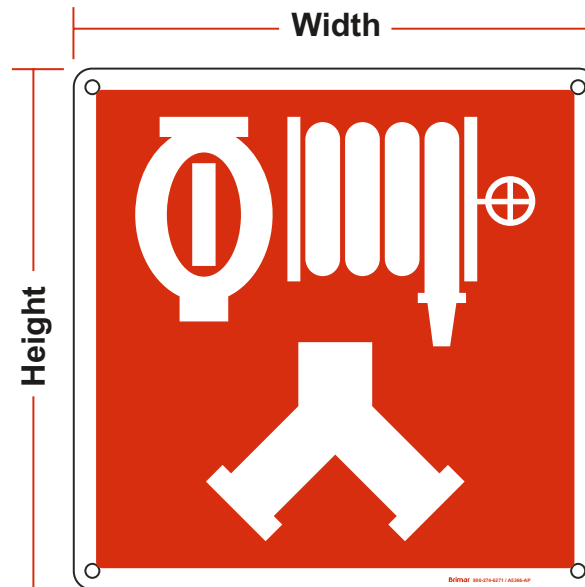

Compliance: NFPA 170

STANDARD MATERIALS AVAILABLE		SIGN SIZES* W x H	
Select	Description	12" Square 305 mm	18" Square 457 mm
<input type="checkbox"/>	Label: Adhesive Backed Vinyl	X	
<input type="checkbox"/>	.055 Plastic	X	
<input type="checkbox"/>	.040, .063, .080 Aluminum	X	X
<input type="checkbox"/>	.063 or .080 Engineering Grade Reflective Aluminum	X	X

* Many more sizes available upon request

Mounting Options:

- Labels are supplied with back adhesive, no holes required.
- Plastic and Aluminum signs are supplied with 4 mounting holes:
12 x 12" have 0.218 dia. holes | 18 x 18" have 0.25" dia. holes
- Safety Signs have been designed for the following applications: fence, wall or flat surface mounting

Standard Ink Colors*: (Close PMS Color Match)

 Red (PMS 485C)

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____



Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Safety Sign Materials

Material Information

MATERIAL THICKNESS	MATERIAL NAME	CHEMICAL RESISTANCE	OUTDOOR DURABILITY	TEMP RANGE	CORNER RADIUS	MOUNT HOLES
3.5 Mil	Adhesive Backed Vinyl	Fading & Mild Chemicals	4 to 5 years	-20°F to 200°F -29°C to 93°C	1/4" (6.3mm)	None
<ul style="list-style-type: none"> Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments. Coated with Aggressive Acrylic Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces Min. Application Temp: 50° F (10°C) Surface Preparation: Clean and Dry LEED Compliance: <p>This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).</p>						
.055" 1.4mm	Polyethylene Plastic	Fading & Mild Chemicals	3 to 5 Years	-40°F to 180°F -40°C to 82°C	1/4" 6.3mm	4 @ 7/32" 5.5mm
.125" 3.2mm					1/2" 13mm	4 @ 1/4" 6.3mm
<ul style="list-style-type: none"> Polyethylene is a rust free, chip and crack resistant plastic Polyethylene signs are an economical alternative to aluminum signs, without significant compromise on durability. Material Flexibility: .055" thick bends easily without causing material fractures, could be molded to fit certain surfaces. Mounting: Wall or fence mounting only. 						
.040" 1mm	Aluminum Coated with Polyester Baked Enamel	Fading and Mild Chemicals	5 to 7 Years	-40° to 212° F -40° to 100° C	1/4" 6.3mm	4 @ 7/32" 5.5mm
.063" 1.6mm					1/2" 13mm	4 @ 1/4" 6.3mm
.080" 2mm					1/2" 13mm	4 @ 1/4" 6.3mm
<ul style="list-style-type: none"> Aluminum offers longer life expectancy and better resistance to harsh weather conditions. Aluminum will not chip, crack or rust. Overlaminated Options (Additional Charge): 3M Anti Graffiti Over Laminate Mounting: Wall or fence mounting only. 						
.063"	Engineering Grade Reflective on Rust Free Aluminum	Fading & Mild Chemicals	up to 7 Years (Except Orange)	-40°F to 200°F -40° C to 93°C	1/4" 6.3mm	4 @ 7/32" 5.5mm
.080"					1/2" 13mm	4 @ 1/4" 6.3mm
<ul style="list-style-type: none"> Engineering Grade (EG) retro-reflective sheeting is a beaded plastic material that renders high retro-reflectivity at night. Engineering Grade (EG) Reflective Sheeting meets ASTM D4956 Type I retro-reflective sheeting standards. Graphics are printed using any of the following printing methods: translucent inks (screen printing), applied vinyl graphics and/or thermal transfer (digital printing); translucent ink or film is not applicable to the color black Aluminum offers longer life expectancy and better resistance to harsh weather conditions. Aluminum will not chip, crack or rust. Overlaminated Options (Additional Charge): 3M Anti Graffiti Over Laminate Mounting: Wall or fence mounting only. 						

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____