


Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Sign D4613

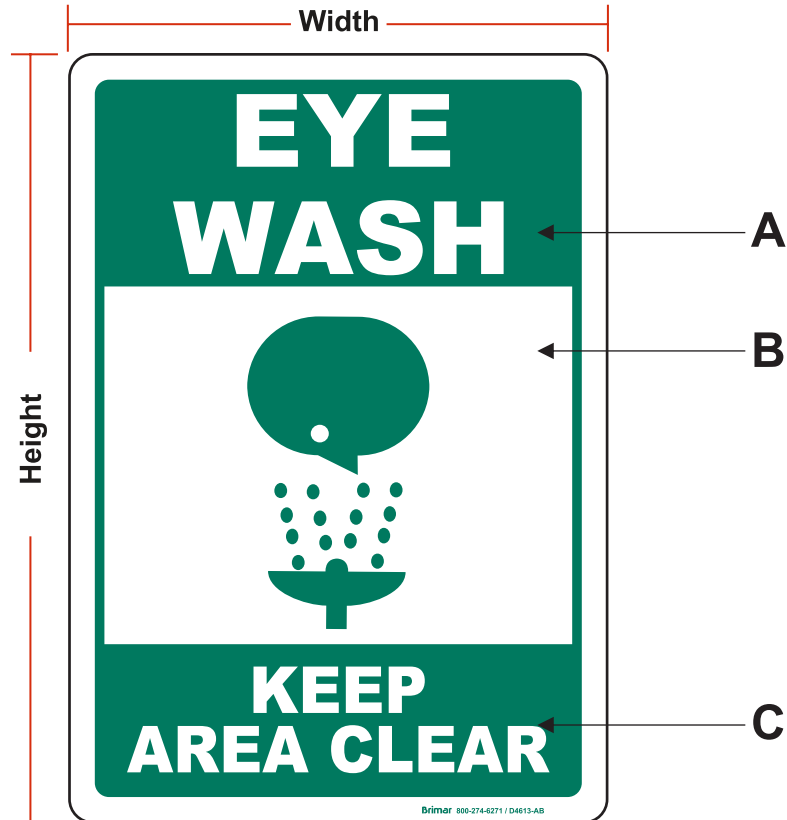

TEXT SIZE CHART

STANDARD MATERIALS		STOCK SIGN SIZES* Width x Height		
Select	Description	7 x 5" 178 x 127 mm	7 x 10" 178 x 254 mm	10 x 14" 254 x 356 mm
<input type="checkbox"/>	Label: Adhesive Backed Vinyl	X	X	X
<input type="checkbox"/>	.055 Plastic		X	X
<input type="checkbox"/>	.040 Aluminum		X	X

SIGN SIZE	SIZE OF A	SIZE OF B	SIZE OF C
7 x 5"	5/8"	3"	7/16"
7 x 10"	15/16"	4"	1/2"
10 x 14"	1-3/8"	5.5"	15/16"

* Other sizes available upon request

Mounting Options:

- Labels are supplied with back adhesive, no holes required.
- Plastic signs are supplied with 4 mounting holes at 0.218 dia.
- Safety Signs have been designed for the following applications: fence, wall or any flat surface mounting

Safety Sign Fonts:

- Standard fonts use: Arial Black

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____



Product Information Bulletin

64 Outwater Lane, Garfield, NJ 07026 Ph: 973-340-7889 | Fax: 973-340-7809

Sign Colors & Materials

Standard Ink Colors*: (Close PMS Color Match)



Material Information

MATERIAL THICKNESS	MATERIAL NAME	CHEMICAL RESISTANCE	OUTDOOR DURABILITY	TEMP RANGE	CORNER RADIUS	MOUNT HOLES
3.5 Mil	Adhesive Backed Vinyl	Fading & Mild Chemicals	4 to 5 years	-20°F to 200°F -29°C to 93°C	1/4" (6.3mm)	None

- Outdoor Grade 3.2 mil thick high gloss adhesive backed calendered vinyl film, printed using UV and chemical resistant inks, to ensure durability in most commercial / industrial environments.
- Coated with Aggressive Acrylic Adhesive formulated to adhere to a variety of insulated and non insulated pipe surfaces
- **Min. Application Temp:** 50° F (10°C)
- **Surface Preparation:** Clean and Dry
- **LEED Compliance:**

This product is in compliance with the Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule #1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC).

.040"	White Aluminum	None	5 to 7 years	-40°F to 212°F	1/4" (6.3mm)	4 @ 7/32" 5.5mm
-------	----------------	------	--------------	----------------	-----------------	--------------------

Rust free aluminum signs usually coated white on both sides.
 Graphics are digital or screen printed with UV inks.
 Aluminum will not chip, crack or rust.
 Aluminum is one of the most durable material options offered, with excellent resistance to harsh weather conditions.
 Printed image will resist fading and mild chemicals.
 Outdoor Durability: 5 to 7 years
 Service Temp Range: -40°F to 212°F
 Ink Features: Printed with UV Inks
 Printing Process: Digital or Screen Printed

MATERIAL THICKNESS	MATERIAL NAME	CHEMICAL RESISTANCE	OUTDOOR DURABILITY	TEMP RANGE	CORNER RADIUS	MOUNT HOLES
.055" 1.4mm	Polyethylene Plastic	Fading & Mild Chemicals	3 to 5 Years	-40°F to 180°F -40°C to 82°C	1/4" 6.3mm	4 @ 7/32" 5.5mm

- Polyethylene is a rust free, chip and crack resistant plastic
- Polyethylene signs are an economical alternative to aluminum signs, without significant compromise on durability.
- **Material Flexibility:** .055" thick bends easily without causing material fractures, could be molded to fit certain surfaces.
- **Mounting:** Wall or fence mounting only.

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____