

Attractive and easy to install, the VEX Series combines contemporary styling with quality LED illumination. Includes covers for both single- and double-face configurations.

Model: _____ Date: _____

Accessories: _____


Job Name: _____ Type: _____

FEATURES & BENEFITS

- Rugged, injection-molded UL 94 5VA flame-retardant, high-temperature thermoplastic housing
- Universal single- or double-face
- Simple, snap-together design
- Field-selectable directional chevron knockouts
- California Energy Commission (CEC) compliant

SPECIFICATIONS

- Illumination:** Long-life, high-intensity, red or green LEDs
- Housing:** UL 94 5VA flame-retardant, high-temperature thermoplastic housing
- Input:** 120/277VAC dual primary, 60Hz
- Battery:** Maintenance-free NiCad battery
- Operating Temp:** 10°C to 40°C (50°F to 104°F)
- Run Time:** UL Listed 90 minute emergency run time, 24 hour recharge time
- Legend:** Fully-illuminated 6" characters with 3/4" stroke and field-selectable directional chevrons
- Mounting:** Ceiling, end or wall mounted, canopy included
- Finishes:** Black or White
- Certifications:** UL Listed for Damp Locations and meets or exceeds the following: NEC requirements and NFPA 101. California Energy Commission (CEC) compliant
- Warranty:** Any component that fails due to a manufacturing defect is guaranteed for five years with a separate three year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Exitronix warranty document for detailed information. (Terms and Conditions apply)

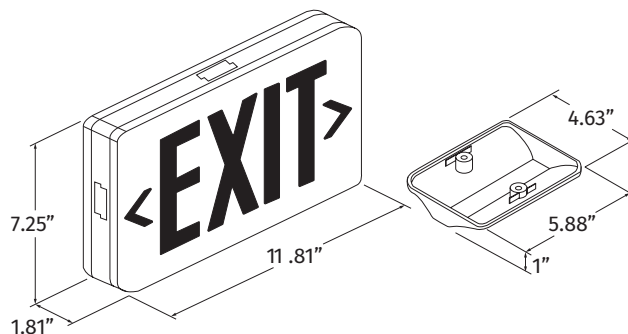

ORDERING INFORMATION Example: VEX-U-WB-WH-G2

Series	Style	Power Source	Finish	Self-test/Self-diagnostics
VEX = Red	U ¹ = Universal	LB = AC Only	BL = Black	G2 ² = Self-test/Self-diagnostics, Remote Monitoring and Reporting
GVEX = Green		WB = NiCad Battery	WH = White	
		2CI = 2 Circuit Input 120/277VAC		
				Accessories ³ (Field installed, order as separate line item)
				ER1-KIT-WH ⁴ = 1' Pendant Mount Kit, White
				ER1-KIT-BL ⁴ = 2' Pendant Mount Kit, Black
				ER2-KIT-WH ⁴ = 2' Pendant Mount Kit, White
				ER2-KIT-BL ⁴ = 2' Pendant Mount Kit, Black
				VEPA = Pendant Adapter
				WG-S = Wire Guard (Back Mount)
				XG-1 = Poly Guard (Back Mount)
				XG-3 = Poly Guard (Ceiling Mount)

Notes

¹ Universal includes second exit face and backplate

² Available on WB units only

³ Order as separate line item

⁴ Requires VEPA accessory option

See [Specialty Signage](#) spec for custom/alternate legends

ELECTRICAL RATINGS

Model	NiCad Battery	Brownout	Low Voltage Disconnect	Overload disconnect	Short Circuit Disconnect	Solid State Transfer	Input Rating			
							VAC	Hz	mA	W
VEX-U-2CI-XX	—	NO	NO	NO	NO	NO	120/277	60	21	2W
GVEX-U-2CI-XX	—	NO	NO	NO	NO	NO	120/277	60	19	1.9W
VEX-U-LB-XX	—	NO	NO	NO	NO	—	120/277	60	23	2.5W
GVEX-U-LB-XX	—	NO	NO	NO	NO	—	120/277	60	24	2.7W
VEX-U-WB-XX	2.4V 300mAh	NO	NO	NO	YES	YES	120/277	60	27	2.5W
GVEX-U-WB-XX	3.6V 300mAh	NO	NO	NO	YES	YES	120/277	60	29	2.9W
VEX-U-WB-XX-G2	3.6V 300mAh	YES	YES	YES	YES	YES	120/277	60	37	4.4W
GVEX-U-WB-XX-G2	3.6V 300mAh	YES	YES	YES	YES	YES	120/277	60	37	4.4W

CONSTRUCTION

The VEX Series is constructed of a precision-molded housing utilizing 5VA flame-retardant, corrosion-proof thermoplastic. Units resist denting, peeling, scratching and corrosion. Black or White finish.

ILLUMINATION

Illumination of the VEX Series is achieved with high-output, long-lasting red or green LEDs. An exclusive color matched diffuser eliminates hot spots and striations, providing optimal light output. LEDs are a maintenance-free solution.

ELECTRICAL

Input

Dual-voltage input 120 or 277VAC @ 60Hz.

Nickel Cadmium Battery – NiCad

Exitronix nickel cadmium batteries are maintenance-free.

Emergency

The VEX Series exit will operate for a minimum of 90 minutes during a loss of power with a 24 hour maximum recharge time for the battery.

Test Button

The test button is easy to locate and provides manual verification of the transfer circuit and emergency backup.

Damp Location Rated

Damp Location Rated fixture that is normally or periodically subject to condensation of moisture in, on or adjacent to, and includes partially protected locations.

INSTALLATION

Simple snap together universal design allows for faceplate and backplate to be fully interchangeable. Mounting canopy is supplied with all signs and snaps into enclosure with two positive locking tabs.

OPTIONS

Guardian G2 Self-test/Self-diagnostics (WB units only)

The Guardian bi-color circuit is factory preset; without any field adjustments needed. It continuously monitors the performance condition of the AC power, battery supply, and charging circuitry.

The intent of this option is to provide visual signaling to identify fault at the Exit. Fault indicators are as follow:

1. Green: On/Ready
Blinking: Testing
2. Red: Service Alert
3. Service Alert LED Code (Red LED Lamp Indicator)

•	One blink, 4 second pause	Battery not connected
• •	Two blinks, 4 second pause	Battery voltage too low
• • •	Three blinks, 4 second pause	Charging circuit failure
• • • •	Four blinks, 4 second pause	Transfer function failure
• • • • •	Seven blinks, 4 second pause	LED strip failure

NOTE: After solving the fault of the emergency equipment, press the test button for two seconds without releasing to reset. LED indicator will show green.

Self-testing/Self-diagnostics also has a manual test function, press test button as follows:

Press test button once	30 Second discharge test
Press test button twice within two seconds	3 Minute discharge test
Press test button three times within two seconds	30 Minute discharge test
Press test button four times within two seconds	90 Minute discharge test

CONFORMANCE TO CODES & STANDARDS

The VEX Series is UL 924 Listed for Damp Locations, CEC compliant and meets or exceeds the following: UL 924, NEC requirements and NFPA 101.